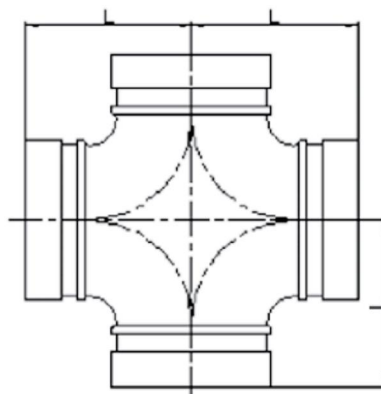


**SPECIFICHE DEI MATERIALI****CORPO:**

Ghisa sferoidale conforme ad ASTM A-536, Grado 65-45-12.

FINITURA

Vernice antiruggine - Colore: Rosso (standard)

Zincatura a caldo - (opzionale)

Diametro Nominale mm/inch	Diametro Esterno mm	Pressione di esercizio Bar/PSI	Dimensione L mm	Croce Mod.	Peso Kg
32 1.1/4"	42,4	34,5 500	70	8068	0,80
40 1.1/2"	48,3	34,5 500	70	8068	0,95
50 2"	60,3	34,5 500	70	8068	1,10
65 2.1/2"	76,1	34,5 500	76	8068	1,95
80 3"	88,9	34,5 500	85	8068	2,35
100 4"	114,3	34,5 500	101	8068	3,70
125 5"	139,7	34,5 500	124	8068	6,35
150 6"	168,3	34,5 500	140	8068	10,35
200 8"	219,1	34,5 500	165	8068	17,85
250 10"	273,0	34,5 500	229	8068	37,85
300 12"	323,9	34,5 500	254	8068	51,80



BOCCIOLONE ANTINCENDIO S.p.A.

unipersonale

Via Indren, 2 Z.I. Roccapietra - 13019 Varallo (VC) - ITALY

TEL: 0163 - 568811 FAX: 0163 - 322022

e-mail: info@bocciolone.com - www.bocciolone.com

SCHEDA TECNICA - **DATA SHEET** STI 942 i 01

Descrizione - **Description**

Art.

CROCE i CROSS

942

Rev. 0

Data i **Date: 10/2015**

Pag. 1 di 1