


Saracinesca cuneo gommato a vite interna, flangiata PN16/ANSI150

Resilient Seated NRS gate valve, flanged PN16/ANSI150

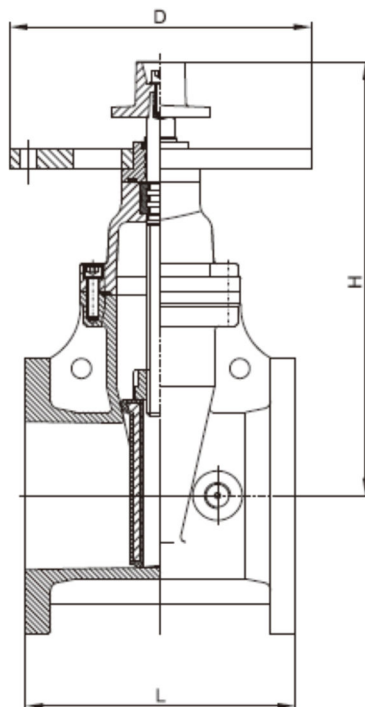

Approvazione UL/FM per il modello 388FF a nome di Gala RS Inc.
UL/FM approvals for model 388FF on behalf of Gala RS Inc.

Norma di riferimento / Reference standard

AWWA C515 / BS5163

Pressione d'esercizio / Working pressure

300PSI / 20.7Bar

Dimensioni e Peso / Dimensions & Weight

Diametro Size	DN inch	50 2"	65 2.1/2"	80 3"	100 4"	150 6"	200 8"	250 10"	300 12"
L	mm inch	178 7.00	191 7.50	203 8.00	229 9.00	267 10.50	292 11.50	330 13.00	356 14.00
H	mm inch	295 11.61	295 11.61	323 12.72	342 13.46	440 17.32	537 21.14	640 25.20	723 28.46
D	mm inch	305 12.01	305 12.01	305 12.01	305 12.01	305 12.01	305 12.01	305 12.01	305 12.01
Peso Weight	Kg	26,00	27,00	30,00	39,00	56,00	90,00	130,00	182,00

Componenti/Components	Materiale/Material	Specifiche/Specification
Corpo/Body	Ghisa duttile /Ductile iron	A536 65-45-12
Cuneo/Wedge	Ghisa rivestita EPDM/Ductile iron EPDM coated	
Stelo/Stem	Acciaio inox/Stainless steel	AISI 304/302
Dado stelo/Wrench nut	Bronzo/Bronze	ASTM B62
Cuffia/Bonnet	Ghisa duttile/Ductile iron	A536 65-45-12
Guarnizione/Gasket	EPDM	
Dado chiave/Wrench nut	Ghisa duttile/Ductile iron	A536 65-45-12
Piastra/Post plate	Ghisa duttile/Ductile iron	A536 65-45-12



BOCCIONE ANTINCENDIO S.p.A.

unipersonale

Via Indren, 2 Z.I. Roccapietra - 13019 Varallo (VC) - ITALY

TEL: 0163 - 568811 FAX: 0163 - 322022

e-mail: info@bocciolone.com - www.bocciolone.com

SCHEDA TECNICA - DATA SHEET ST-959FM-01

Descrizione - description

Art.

Saracinesca a vite interna NRS

flangiata

Flanged NRS gate valve

959/FM

Rev. 1

Data -Date: 27/09/2019

Pag. 1 di 1