


Saracinesca cuneo gommato a vite esterna, flangiata PN16/ANSI150

Resilient Seated OS&Y gate valve, flanged PN16/ANSI150



Approvazione UL/FM per il modello 399FF a nome di Gala RS Inc.
UL/FM approvals for model 399FF on behalf of Gala RS Inc.

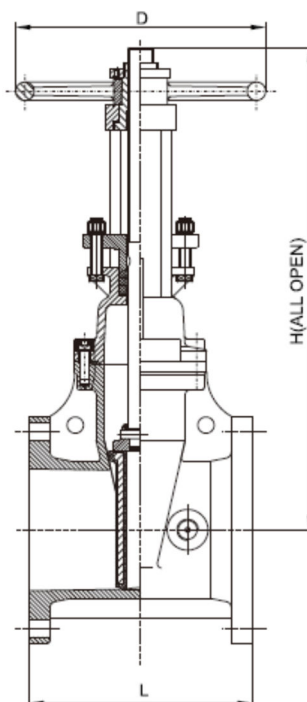

Norma di riferimento / Reference standard

AWWA C515 / BS5163

Pressione d'esercizio / Working pressure

300PSI / 20.7Bar

Dimensioni e Peso / Dimensions & Weight

diametro size	DN	50	65	80	100	150	200	250	300
	inch	2"	2.1/2"	3"	4"	6"	8"	10"	12"
L	mm	178	191	203	229	267	292	330	356
	inch	7.00	7.50	8.00	9.00	10.50	11.50	13.00	14.00
H	mm	418	418	488	538	740	935	1126	1316
	inch	16.46	16.46	19.21	21.18	29.13	36.81	44.33	51.81
D	mm	183	183	253	253	306	355	445	445
	inch	7.20	7.20	9.96	9.96	12.05	13.98	17.52	17.52
peso weight	Kg	20,00	21,00	28,00	37,00	58,00	90,00	138,00	290,00

Componenti/Components

Corpo/Body
Cuneo/Wedge
Dado cuneo /Wedge Nut
Stelo/Stem
Cuffia/Bonnet
Guarnizione/Gasket
Dado stelo/Stem Nut
Volantino/Handwheel

Materiale/Material

Ghisa duttile /Ductile iron
Ghisa rivestita EPDM/Ductile iron EPDM coated
Acciaio inox/Stainless steel
Acciaio inox/Stainless steel
Ghisa duttile/Ductile iron
EPDM
Bronzo/Bronze
Ghisa duttile/Ductile iron

Specifiche/Specification

A536 65-45-12

AISI 304
AISI 304/302
A536 65-45-12

ASTM B62
A536 65-45-12



BOCCIOLONE ANTINCENDIO S.p.A.

unipersonale

Via Indren, 2 Z.I. Roccapietra - 13019 Varallo (VC) - ITALY
TEL: 0163 - 568811 FAX: 0163 - 322022
e-mail: info@bocciolone.com - www.bocciolone.com

SCHEDA TECNICA - DATA SHEET ST-961FM-01

Descrizione - description	Art.
Saracinesca a vite esterna OS&Y flangiata Flanged OS&Y gate valve	961/FM
Rev. 1	Data -Date: 27/09/2019
	Pag. 1 di 1